
# PREMIUM PROTECTION FOR YOUR 4" PUMP INVESTMENT



Low incoming voltage, a drop in water level, or other application hazards can seriously damage a submersible pump. The best way to protect your investment is with Pumptec. This electronic, easy-to-install control monitors motor load and automatically shuts off your Franklin single-phase 4" motor when the motor load drops below a pre-set level.

### **Pumptec Protects Against:**

- Low voltage
- Drop in water level
- Low yielding well
- Air or gas locked pump
- Clogged well screen
- Broken shaft or coupling
- Worn pump parts

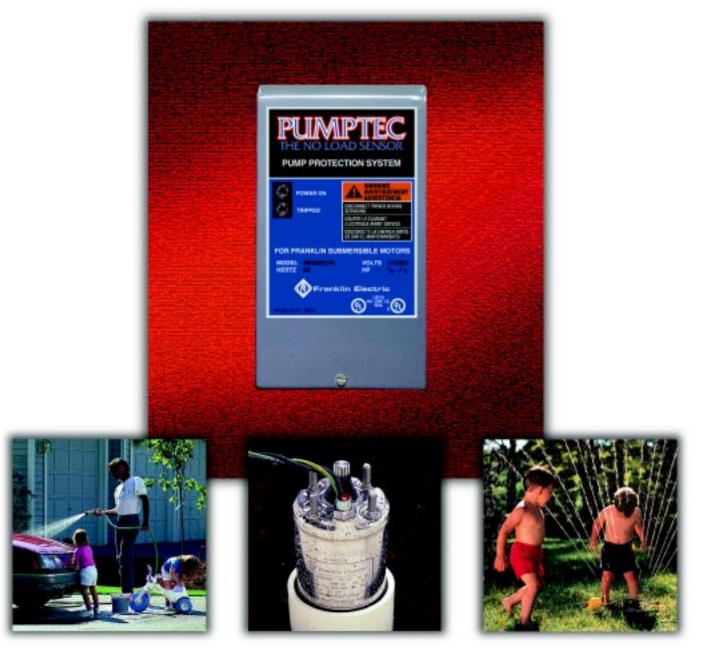


## **PUMPTEC, DESIGNED TO PROTECT!**

### **FEATURES**

- Works with Franklin 4" single-phase 2-wire or 3-wire induction-run submersible motors up to 1 Hp and 1.5 Hp capacitor-run motors.
- Compact Quick-Disconnect box with rugged, weather-proof construction
- · Easy installation and mounting
- Field adjustable automatic reset from 2 to 90 minutes or manual reset
- "Tripped" and "Power On" indicator lights
- External signaling capability (up to 1 amp)
- · Surge resistant
- UL/cUL Listed
- · One year factory warranty

### **SPECIFICATIONS**

Model Number	60 Hz 580 002 0116 50 Hz 580 002 0516
Horsepower	1/3 - 1.5 Hp
Voltage	60 Hz - 115V/230V 50 Hz - 220V
Trip Point	Factory set
Reset time	Adjustable from 2 to 90 minutes or manual reset

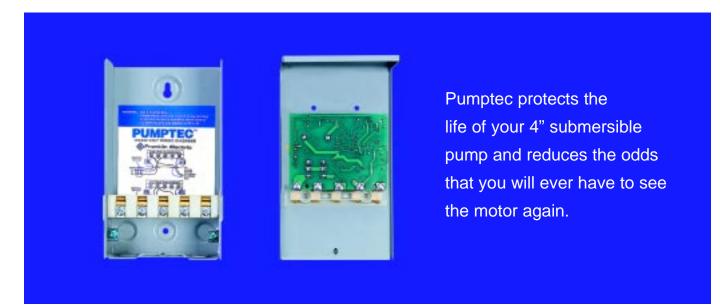

Pumptec products are the only single-phase load monitoring devices designed specifically for Franklin submersible motors.

Call your pump supplier or Franklin Electric today to see why Pumptec is right for you!

